

Only for
Roquette employees,
distributors and agents


Get Higher in latex replacement Replace oxidized potato STABILYS® EVO

STABILYS® EVO
Range for Coated
Paper & Board



ROQUETTE

Offering the best of nature™

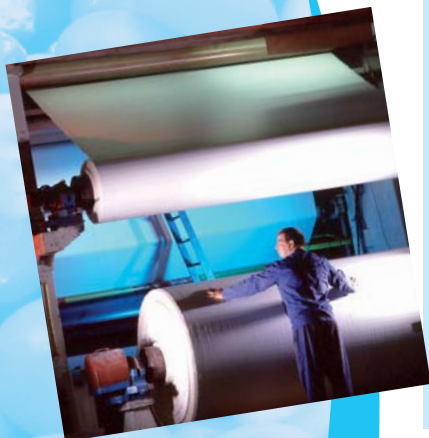

Targeted customers

Coated papers producers

- ✓ Woodfree
- ✓ LWC / MWC / HWC
- ✓ Specialty papers

Coated Boards producers

- ✓ FBB (folding box board)
- ✓ CRB (coated recycled board)

Key questions

- ✓ What is limiting your latex replacement?
- ✓ Do you want to replace oxidized potato in surface sizing?
- ✓ Do you want to decrease dependency from oil based binders?

References

- ✓ Stora Enso, UPM
- ✓ Most advanced coating starch, developed 2014

Main advantages of STABILYS® EVO Range

- ✓ Up to 100% latex replacement proven in pre coating of board
- ✓ Up to 80% latex replacement proven in coated papers
- ✓ Improved stability, rheology and binding power
- ✓ 1:1 latex replacement ratio
- ✓ Stiffness, water retention & coating holdout improvement
- ✓ Significant cost reduction thanks to maximum latex replacement

STABILYS® EVO Range

- ✓ STABILYS® EVO 250 for replacing oxidized potato in surface sizing
- ✓ STABILYS® EVO 850 for maximized latex replacement in coating
- ✓ Preferably jet cooking 135°C, batch cooking possibility (30 min, 95°C)





www.roquette.com

For more info contact Mr. Olli Siiskonen
Tel. +358 40 8699 559
e-mail olli.siiskonen@roquette.com